



Columbus JACK/Regent

“The Strength of Experience”

PRODUCT DATA SHEET

HAND CARRY AXLE JACK

Model 1504-50, 15 Ton Capacity

Standard Features

- ◆ 15 Ton Capacity
- ◆ Manual Hand Pump
- ◆ Pressure Relief Valve Assembly
- ◆ Carrying Handle
- ◆ Pump Handle
- ◆ Skydrol Resistant Yellow Paint

Documentation

- ◆ Operation & Maintenance Manual
- ◆ Certificate of Conformance
- ◆ Load Test Reports
- ◆ Factory New – 12 Month Warranty



Our Hand Carry Axle Jacks are designed to meet jacking specifications for normal tire/wheel and brake replacement, and in most cases for both main and nose landing gears for most business, commuter, narrow and wide body airplanes. This jack provides maximum capacity within a light weight and compact configuration for ease of carrying and transporting to the jacking site and is completely self-contained with manual hand pump.

HAND CARRY AXLE JACK SPECIFICATIONS								
VERTICAL CAPACITY (Tons/m tonnes)	MINIMUM HEIGHT (Inches/mm)	HYDRAULIC LIFT (Inches/mm)	SCREW EXTENSION (Inches/mm)	MAXIMUM EXTENDED HEIGHT (Inches/mm)	NET WEIGHT (Est.) (Lbs/kg)	CRATED WEIGHT (Est.) (Lbs/kg)	CRATE DIMENSIONS (Est. - L x W x H) (Inches/mm)	CU FT CRATED (Est.) (Cu ft/cu m)
15	4.75	7.6	2.5	14.9	60	75	19 x 7 x 9	.7
13.6	121	193	64	378	27.2	31.8	483 x 178 x 229	.02




Columbus JACK/Regent

"The Strength of Experience"

ISO 9001:2008

HAND CARRY AXLE JACK

Model 1504-50, 15 Ton Capacity

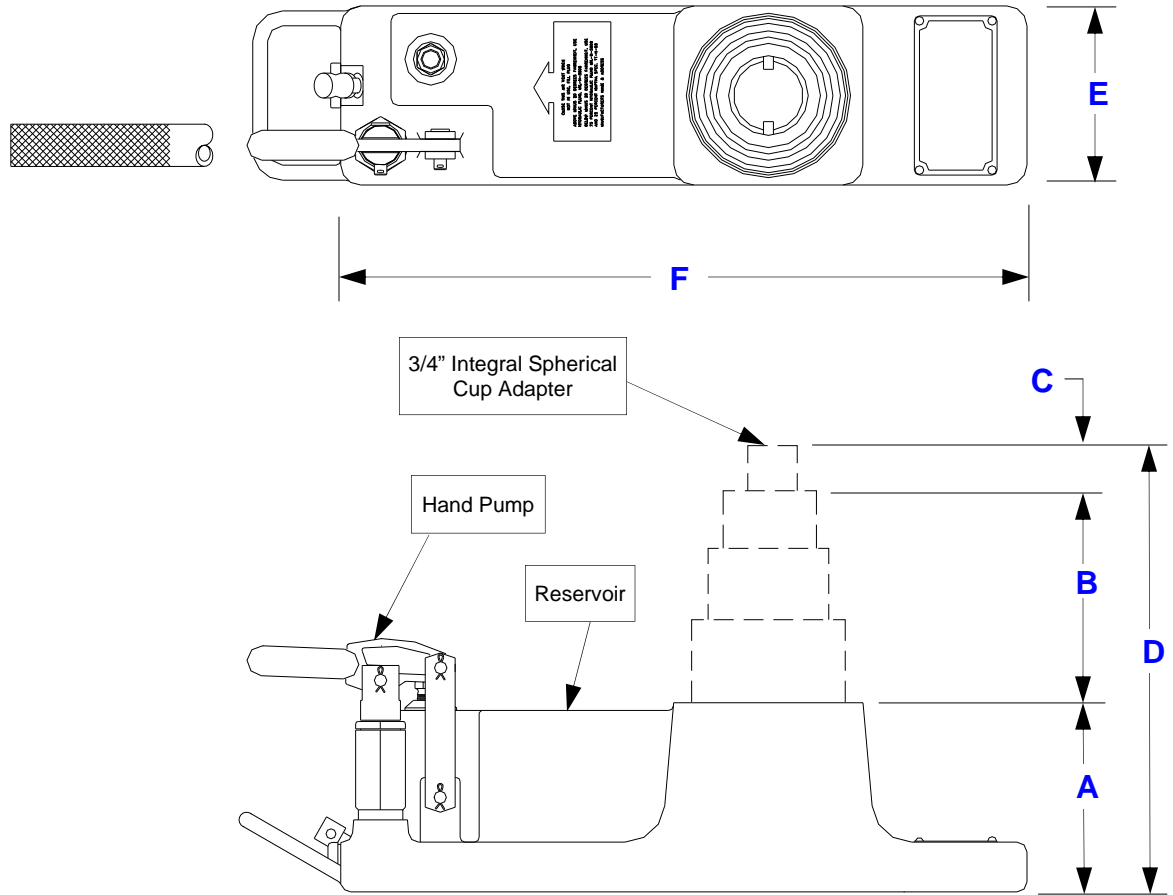

HAND CARRY AXLE JACK SPECIFICATIONS						
	A	B	C	D	E	F
VERTICAL CAPACITY (Tons/m tonnes)	MINIMUM CLOSED HEIGHT (Inches/mm)	HYDRAULIC LIFT (Inches/mm)	SCREW EXTENSION (Inches/mm)	MAXIMUM EXTENDED HEIGHT (Inches/mm)	WIDTH OF BASE (Inches/mm)	LENGTH OF BASE (Inches/mm)
15	4.75	7.6	2.5	14.9	4.5	17.25
13.6	121	193	64	378	114	438