



ISO 9001:2008

Columbus JACK/Regent

“The Strength of Experience”

PRODUCT DATA SHEET

HAND CARRY AXLE JACK

Model 9719-010, 10 Ton Capacity

Standard Features

- ♦ 10 Ton Capacity
- ♦ Manual Hand Pumps
- ♦ Pressure Relief Valve Assembly
- ♦ Carrying Handle
- ♦ Pump Handle
- ♦ Skydrol Resistant Yellow Paint

Documentation

- ♦ Operation & Maintenance Manual
- ♦ Certificate of Conformance
- ♦ Load Test Reports
- ♦ Factory New – 12 Month Written Warranty



Our Hand Carry Axle Jack is designed to meet jacking specifications for normal tire/wheel and brake replacement, and in most cases for both main and nose landing gears for most business, commuter, narrow and wide body airplanes. It provides maximum capacity within a light weight and compact configuration for ease of carrying and transporting to the jacking site and is completely self-contained with a manual hand pump.

HAND CARRY AXLE JACK SPECIFICATIONS

VERTICAL CAPACITY (Tons/m tonnes)	MINIMUM HEIGHT (Inches/mm)	HYDRAULIC LIFT (Inches/mm)	SCREW EXTENSION (Inches/mm)	MAXIMUM EXTENDED HEIGHT (Inches/mm)	NET WEIGHT (Est.) (Lbs/kg)	CRATED WEIGHT (Est.) (Lbs/kg)	CRATE DIMENSIONS (Est. - L x W x H) (Inches/mm)	CU FT CRATED (Est.) (Cu ft/cu m)
10	4.0	6.25	1.5	11.75	40	45	15 x 6 x 9	.5
9.1	102	159	38	299	18	20	381 x 152 x 229	.01




Columbus JACK/Regent

"The Strength of Experience"

ISO 9001:2008

HAND CARRY AXLE JACK

Model 9719-010, 10 Ton Capacity

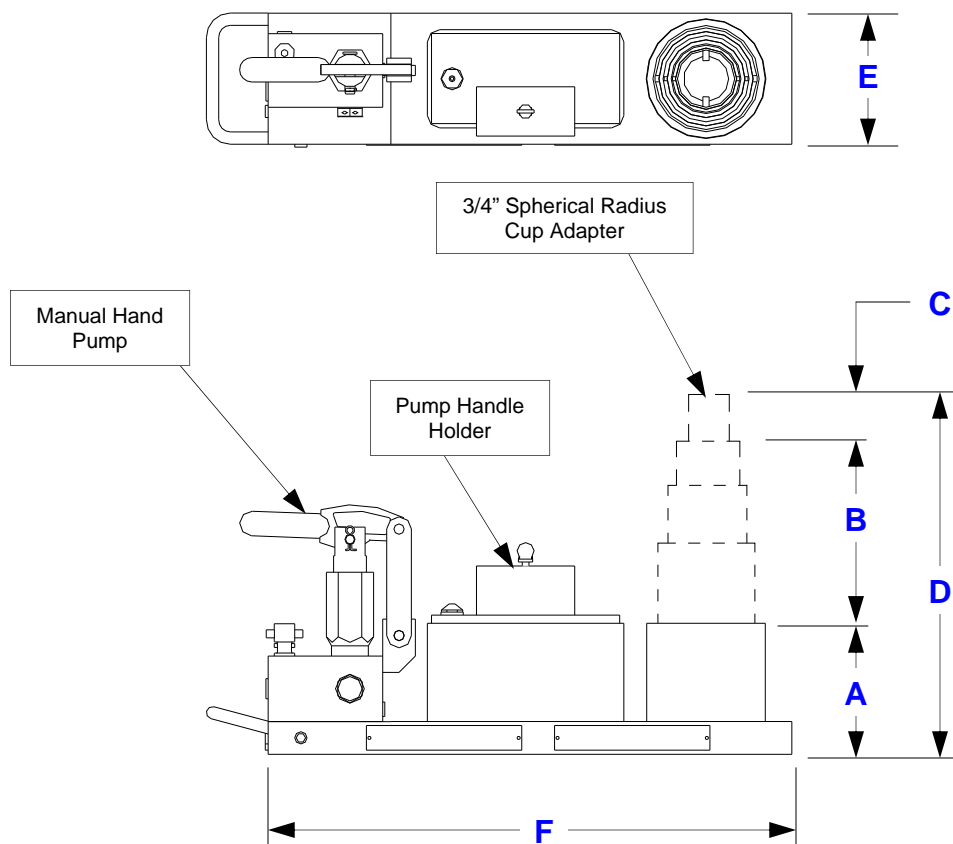

HAND CARRY AXLE JACK SPECIFICATIONS						
	A	B	C	D	E	F
VERTICAL CAPACITY (Tons/m tonnes)	MINIMUM CLOSED HEIGHT (Inches/mm)	HYDRAULIC LIFT (Inches/mm)	SCREW EXTENSION (Inches/mm)	MAXIMUM EXTENDED HEIGHT (Inches/mm)	WIDTH OF BASE (Inches/mm)	LENGTH OF BASE (Inches/mm)
10	4.0	6.25	1.5	11.75	4.0	13.0
9.1	102	159	38	299	102	330