

## SK-500 Hydraulic Hand Pump

The SK-500 are robust and easily maintained units which give a long life of trouble-free service. Two hardened steel pistons operating in cast-iron cylinders create pressure at each stroke of the handle. The unit incorporates a relief valve, with a setting range of 1000 to 3000 psi (69 to 207 bar) and a manually operated pressure release valve.

A special feature, which considerably facilitates maintenance, is that the pistons have no rubber seals. The pump handle can be fitted in any one of the three positions.


### Operational Data

Delivery	0.80 in <sup>3</sup> (13 cm <sup>3</sup> ) per double stroke.
Hand Load	Maximum: 60 lb at 3000 psi (27 kg at 207 bar)
Reservoir Capacity (HP 6BT)	6 pints (3,4 litres)
Weight (approx)	14 lb (6,4 kg)
Application	Suitable for use with most mineral based hydraulic fluids.



## Installation Dimensions

All dimensions are in inches with mm equivalents in brackets

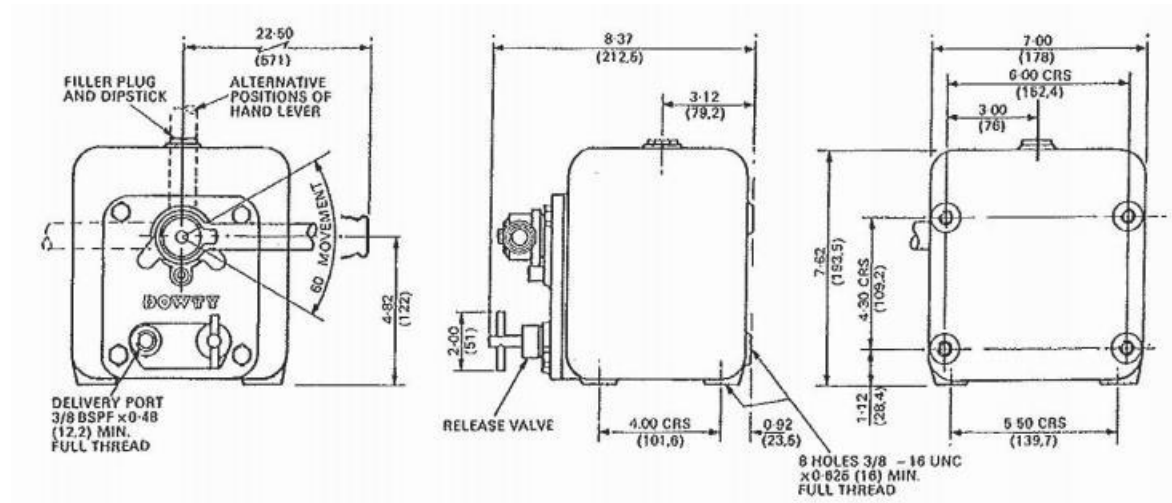

## Installation Note

Units must be installed in the position shown, that is in the vertical position with handle pivot above the delivery port.